

GEMINI

Luminux Gemini Series LED spotlights are suitable for applications where a small fitting is required, such as joinery and furniture lighting, small showcase, discrete architectural lighting, kitchen and bathroom etc.





SPECIFICATIONS


Input Voltage	Max 12VDC
LED Quantity	1 x 3W
Power Consumption	3W
LED Classification	High Power Cree 3W(700mA)
Color Temperature	Natural White / Warm White
Life Span	50,000hrs
Operation Temperature	-20°C ~ +50°C
Standard Lens Angle	40°
Weight	40g / 56g (Exclude Driver)
Exclusive LED Driver	Included




DIMENSION

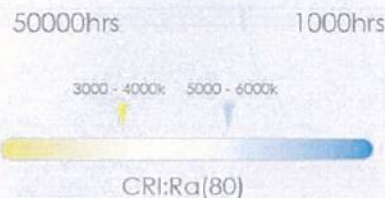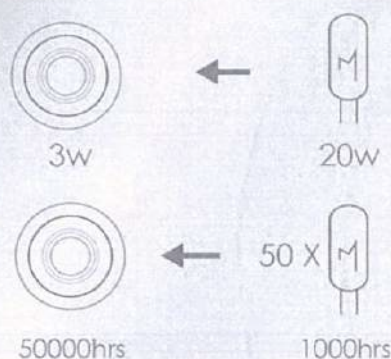

Adjustable Spot

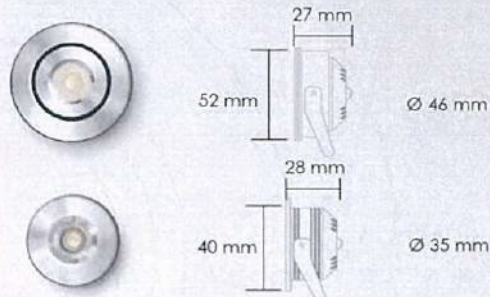

Fixed Spot

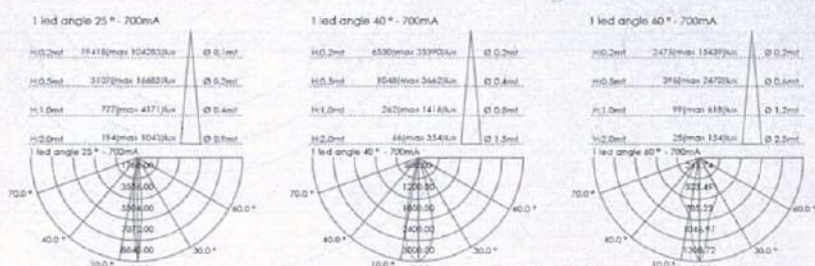

LED Driver: LD-CU7012-01: Input 100 - 240VAC, Output 3 - 12VDC, 700mA

Kinwick Materials Limited - Wilson Fung 92303714 Email: wilsonfung168@hotmail.com



LEO

The Luminux Leo consists of 3X3W high power LED and features Four Dimensions Adjustable Function. Leo is the best to be applied to the window showcases, product displays and general lighting.




SPECIFICATIONS

Input Voltage	12VDC / 24VDC
LED Quantity	3 x 3W
Power Consumption	9W
LED Classification	High Power Cree 3W(700mA)
Color Temperature	Natural White / Warm White
Life Span	50,000hrs
Operation Temperature	-20°C ~ +50°C
Standard Lens Angle	40°
Weight	265g (Exclude Driver)
Dimming	Yes (0 - 100%) Optional Dimmer Required
Exclusive LED Driver	Included







DIMENSION

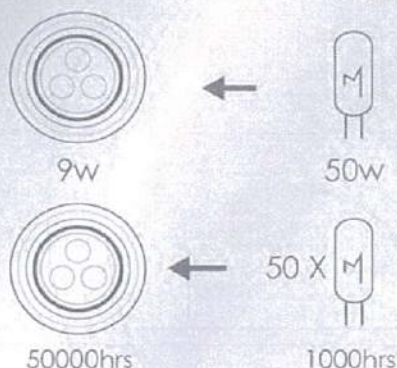

3000 - 4000k 5000 - 6000k

CRI:Ra(80)

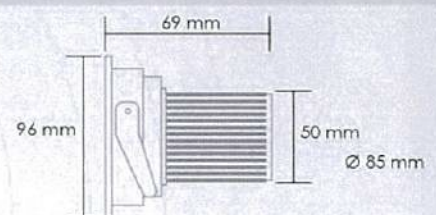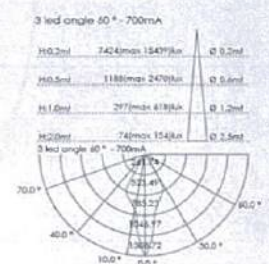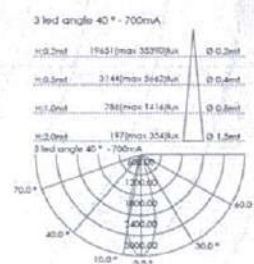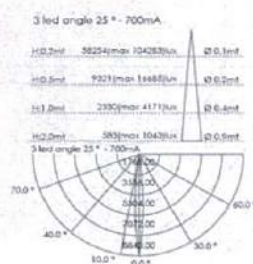

LED Driver: Luminux VA24040D006: Input 170 - 250VAC, Output 24VDC
Luminux VA-12030M: Input 170 - 250VAC, Output 12VDC

Kinwick Materials Limited - Wilson Fung 92303714 Email: wilsonfung168@hotmail.com



TAURUS

The Luminux Taurus consists of 6X3W high power LED and features Four Dimensions Adjustable function. Taurus is the best for the product displays, commercial and residential downlighting. The Dynamic Airflow heatsink design ensures the LED power and reliability.








SPECIFICATIONS

Input Voltage	24VDC
LED Quantity	6 x 3W
Power Consumption	18W
LED Classification	High Power Cree 3W(700mA)
Color Temperature	Natural White / Warm White
Life Span	50,000hrs
Operation Temperature	-20°C ~ +50°C
Standard Lens Angle	40°
Weight	660g (Exclude Driver)
Dimming	Yes (0 - 100%) Optional Dimmer Required
Exclusive LED Driver	Included



DIMENSION

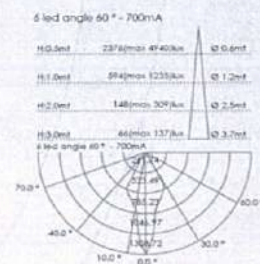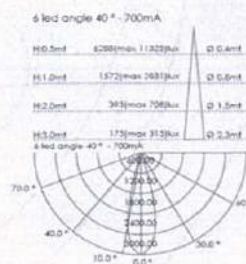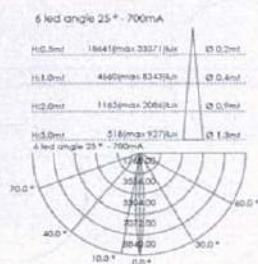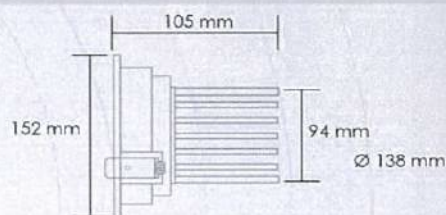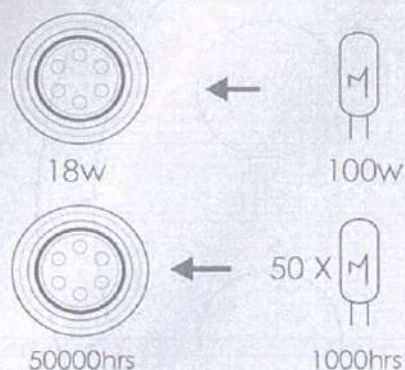

LED Driver: Luminux VA24040D006: Input 170 - 250VAC, Output 24VDC

Kinwick Materials Limited - Wilson Fung 92303714 Email: wilsonfung168@hotmail.com



ARIES

The Luminux Aries consists of 9X3W high power LED which offers superior light output whilst consuming minimal energy. Aries features Four Dimensions Adjustable function, and incorporates with stylish design, which is the best for general downlighting in any high-end domestic and commercial projects. The Dynamic Airflow heatsink design ensures the LED Power and reliability.








SPECIFICATIONS

Input Voltage	12VDC / 24VDC
LED Quantity	9 x 3W
Power Consumption	27W
LED Classification	High Power Cree 3W(700mA)
Color Temperature	Natural White / Warm White
Life Span	50,000hrs
Operation Temperature	-20°C ~ +50°C
Standard Lens Angle	40°
Weight	680g (Exclude Driver)
Dimming	Yes (0 - 100%) Optional Dimmer Required
Exclusive LED Driver	Included



DIMENSION

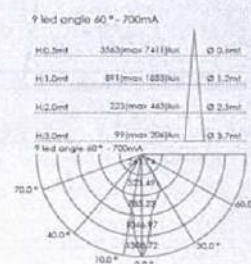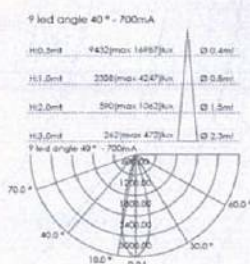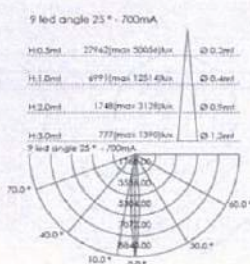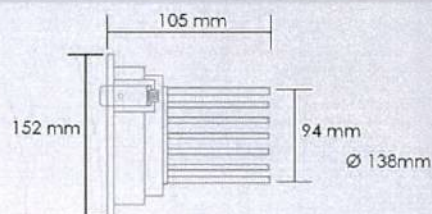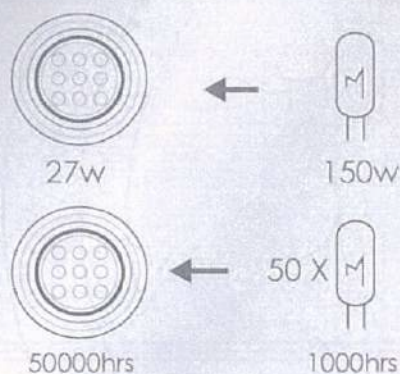

LED Driver: Luminux VA24040D006: Input 170 - 250VAC, Output 24VDC
Luminux VA-12030M: Input 170 - 250VAC, Output 12VDCDC

Kinwick Materials Limited - Wilson Fung 92303714 Email: wilsonfung168@hotmail.com



LIBRA

The Luminux Libra series consist of 6x3W and 6x3Wx2 high power LED and featuring Four Dimensions Adjustable function. Libra are the best for product displays commercial and residential downlighting. The dynamic airflow heatsink design ensures the LED power and reliability.



SPECIFICATIONS

Input Voltage	24VDC Per Unit
LED Quantity	6 x 3W / 6 x 3W x 2
Power Consumption	18W / 36W
LED Classification	High Power Cree 3W(700mA)
Color Temperature	Natural White / Warm White
Life Span	50,000hrs
Operation Temperature	-20°C ~ +50°C
Standard Lens Angle	40°
Weight	Approx 1210g / 2160g (Exclude Driver)
Dimming	Yes (0 - 100%) Optional Dimmer Required
Exclusive LED Driver	Included



DIMENSION




18w



50000hrs







100w



50 X

1000hrs

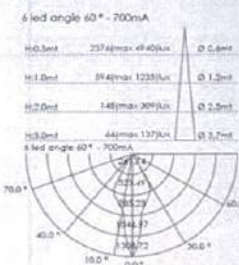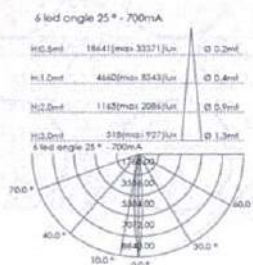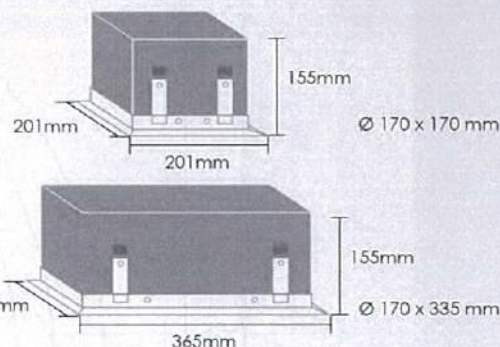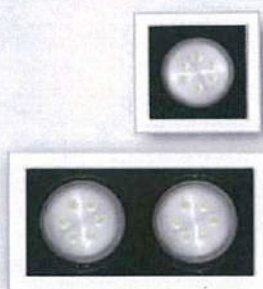

LED Driver: Lunimux VA24040D006: Input 170 - 250VAC, Output 24VDC



CAPRICORN

The Luminux Capricorn series consist of 9x3W and 9x3Wx2 high power LED which offer superior light output whilst consuming minimal energy. Capricorn features Four Dimensions Adjustable function and incorporates with stylish design which are the best for general downlighting in any high-end domestic and commercial projects. The dynamic airflow heat-sink design ensures the LED power and reliability.

SPECIFICATIONS

Input Voltage	12 VDC / 24VDC Per Unit
LED Quantity	9 x 3W / 9 x 3W x 2
Power Consumption	27W / 54W
LED Classification	High Power Cree 3W(700mA)
Color Temperature	Natural White / Warm White
Life Span	50,000hrs
Operation Temperature	-20°C ~ +50°C
Standard Lens Angle	40°
Weight	Approx 1220g / 2160g (Exclude Driver)
Dimming	Yes (0 - 100%) Optional Dimmer Required
Exclusive LED Driver	Included



DIMENSION




27w




50000hrs

3000 - 4000k 5000 - 6000k

CRI:Ra(80)




150w



50 X


1000hrs

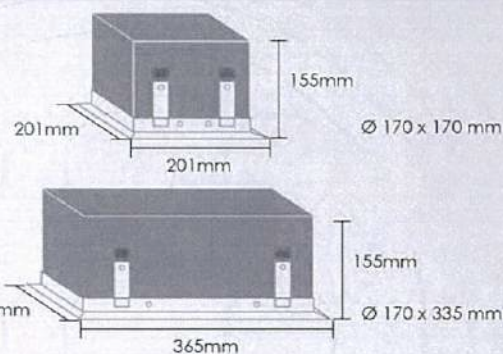


9 led angle 25° - 700mA



9 led angle 40° - 700mA

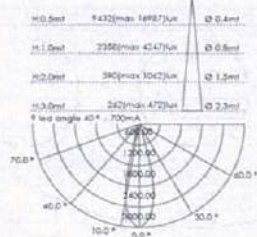

9 led angle 60° - 700mA

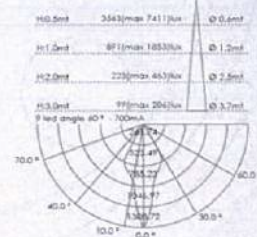

LED Driver: Luminux VA24040D006: Input 170 - 250VAC, Output 24VDC
Luminux VA-12030M: Input 170 - 250VAC, Output 12VDC



Kinwick Materials Limited - Wilson Fung 92303714 Email: wilsonfung168@hotmail.com

TRACY

The Luminux Tracy Recessed Light consists of 6X3W high power LED and features Four Dimensions Adjustable Function. The unique recessed design can effectively reduce the glare from the LED light source. The Dynamic Airflow heatsink design ensures the LED power and reliability. Tracy can be applied to hotels, retail shops and general office as down lighting.








SPECIFICATIONS

Input Voltage	24VDC
LED Quantity	6 x 3W
Power Consumption	18W
LED Classification	High Power Cree 3W(700mA)
Color Temperature	Natural White / Warm White
Life Span	50,000hrs
Operation Temperature	-20°C ~ +50°C
Standard Lens Angle	40°
Weight	710g (Exclude Driver)
Dimming	Yes (0 - 100%) Optional Dimmer Required
Exclusive LED Driver	Included



DIMENSION

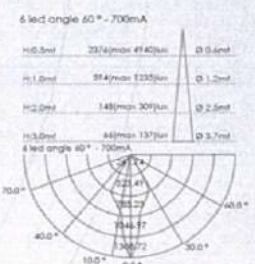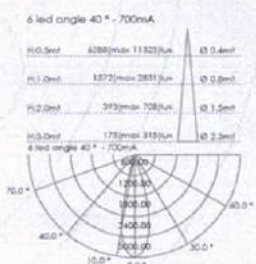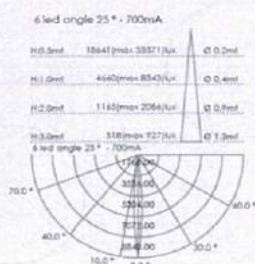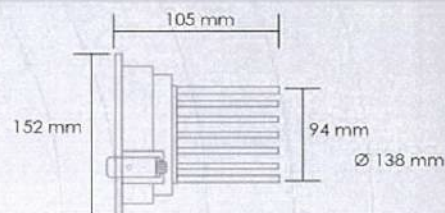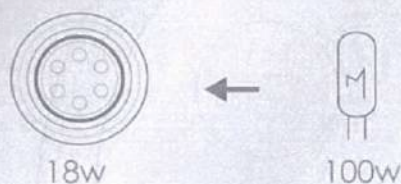

LED Driver: Luminux VA24040D006: Input 170 - 250VAC, Output 24VDC

Kinwick Materials Limited - Wilson Fung 92303714 Email: wilsonfung168@hotmail.com



CALLIE

The Luminux Callie Recessed Light consists 3X3W high power LED and features Four Dimensions Adjustable function. The unique recessed design can effectively reduce the glare from the LED light source. Callie can be applied to hotels, retail shops and offices as general lighting.








SPECIFICATIONS

Input Voltage	12VDC / 24VDC
LED Quantity	3 x 3W
Power Consumption	9W
LED Classification	High Power Cree 3W(700mA)
Color Temperature	Natural White / Warm White
Life Span	50,000hrs
Operation Temperature	-20°C ~ +50°C
Standard Lens Angle	40°
Weight	275g (Exclude Driver)
Dimming	Yes (0 - 100%) Optional Dimmer Required
Exclusive LED Driver	Included



DIMENSION

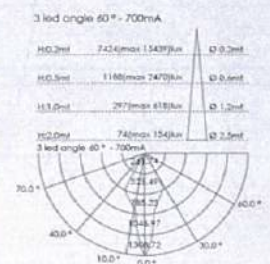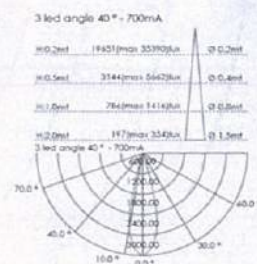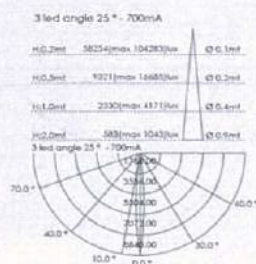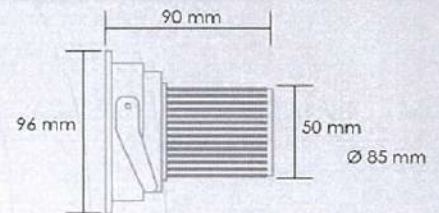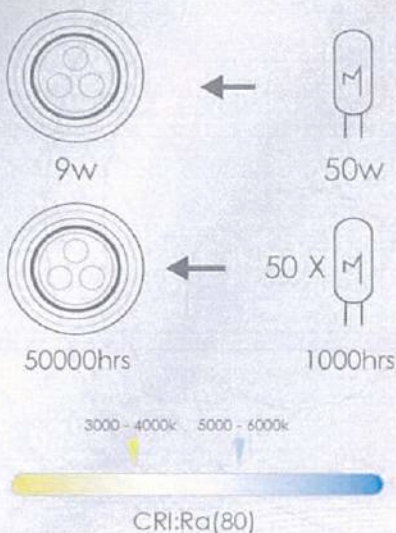

LED Driver: Luminux VA24040D006: Input 170 - 250VAC, Output 24VDC
Luminux VA-12030M: Input 170 - 250VAC, Output 12VDC



FION

The Luminux Fion Recessed Light consists of 9X3W high power LED and features Four Dimensions Adjustable function. The unique recessed design can effectively reduce the glare from the LED light source. The dynamic Airflow heatsink design ensures the LED power and reliability. Fion can be applied to hotels, retail shops and general offices as general lighting.








SPECIFICATIONS

Input Voltage	12VDC / 24VDC
LED Quantity	9 x 3W
Power Consumption	27W
LED Classification	High Power Cree 3W(700mA)
Color Temperature	Natural White / Warm White
Life Span	50,000hrs
Operation Temperature	-20°C ~ +50°C
Standard Lens Angle	40°
Weight	715 g (Exclude Driver)
Dimming	Yes (0 - 100%) Optional Dimmer Required
Exclusive LED Driver	Included



DIMENSION

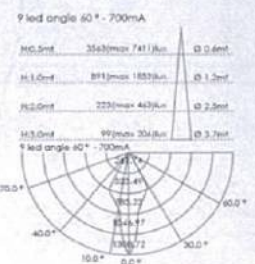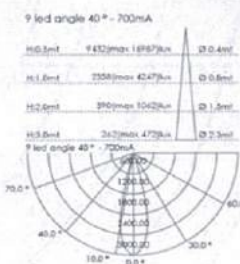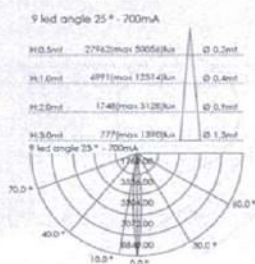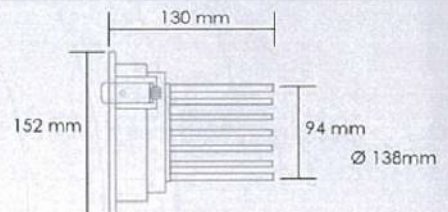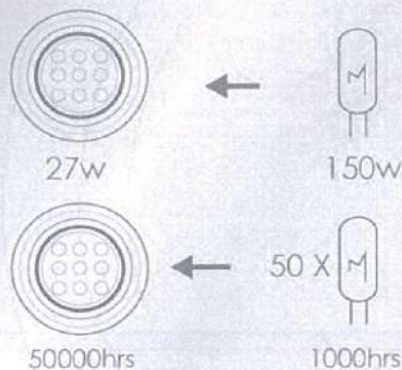

LED Driver: Luminux VA24040D006: Input 170 - 250VAC, Output 24VDC
Luminux VA-12030M: Input 170 - 250VAC, Output 12VDC



SCORPIO

The Luminux Scorpio Lampline has extremely strong light output. The Scorpio Lampline incorporates the Cree high power LED Technology. It can be easily replace fluorescent lamp and other less efficient light sources. It can be connected for longer lengths the smooth light output has NO "dark spots" or shadows.

SPECIFICATIONS

Input Voltage	24VDC
LED Quantity	6 LED per 250mm
Power Consumption	6W per 250mm
LED Classification	High Power Cree LED
Color Temperature	Natural White / Warm White
Life Span	50,000hrs
Operation Temperature	-20°C ~ +50°C
View Angle	120°
Weight	110g per 250mm
Dimming	Yes (0 - 100%) Optional Dimmer Required
Exclusive LED Driver	Included



DIMENSION



LED Driver: Luminux VA24040D006: Input 170 - 250VAC, Output 24VDC

Kinwick Materials Limited - Wilson Fung 92303714 Email: wilsonfung168@hotmail.com



SCORPIO

Luminux is proud to present you the Buxus LED Shop Light which is perfect for the retail shops, supermarkets, window displays and most of commercial and architectural lighting. This unique simple and classic design comes with the cutting edge LED technology and heat dissipation technology. It adopts Samsung LED module technology which can produce 2240 lumen with 38W only. The color rendering is up to 90CRI. It is now possible to reduce energy consumption and maintenance costs without compromising on light quality and ambience.

Features

- Simple and Classic Design
- Aluminum Cooling System
- Samsung LED Module
- High quality reflector with Tempered Glass Cover
- Ultra-easy Installation
- Super Long Life - 70% maintenance of lumen after 50000 hours
- Super High Color Rendering (90 CRI)
- 90° Adjustable Angle
- Power factor: >0.87
- RoHS Compliant
- UV and IR Free




Product Offering


Item	LED Color	Reflector Angle	Finishing	Power Supply	CRI	Watt	Lumen	Note
Buxus	 2700K	120°	 White	220-240VAC	90	38W	2100-2240	
	 3000K		 Black					
	 4000K		 Aluminum Grey					
	 5000K							

Application Information



- Retail Shops
- Supermarket
- Window Display
- Spot Lighting
- Commercial Lighting

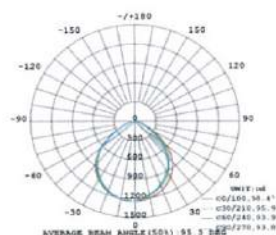

Photometric



Dimension

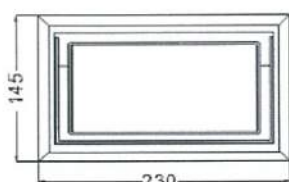 227 X 130mm

Weight: 1.2kg

Optional Accessories



Luminux Buxus II LED Shop Light

Luminux® High Power LED Lighting
www.luminux.com.hk

Luminux is proud to present you the Buxus II LED Shop Light which is perfect for the retail shops, supermarkets, window displays and most of commercial and architectural lighting. This unique simple and classic design comes with the cutting edge LED technology and heat dissipation technology. It adopts (Cree, USA,) LED module technology which can produce 2460 lumen with 36W only. The color rendering is up to 90CRI. It is now possible to reduce energy consumption and maintenance costs without compromising on light quality and ambience.

Features

- Simple and Classic Design
- Aluminum Cooling System
- LED module Cree, USA
- High quality reflector with Tempered Glass Cover
- Ultra-easy Installation
- Super Long Life - 70% maintenance of lumen after 50000 hours
- Super High Color Rendering (90 CRI)
- 90° Adjustable Angle
- Power factor: >0.87
- RoHS Compliant
- UV and IR Free





Product Offering

Item	LED Color	Reflector Angle	Finishing	Power Supply	CRI	Watt	Lumen	Note
Buxus II	2700K	120°	White	220-240VAC	90	36W	2300-2460	
	3000K		Black					
	4000K		Aluminum Grey					
	5000K							


Application Information

- Retail Shops
- Supermarket
- Window Display
- Spot Lighting
- Commercial Lighting

Photometric

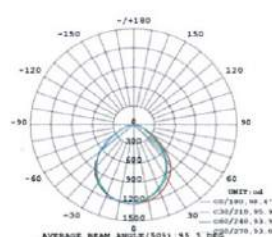

Dimension

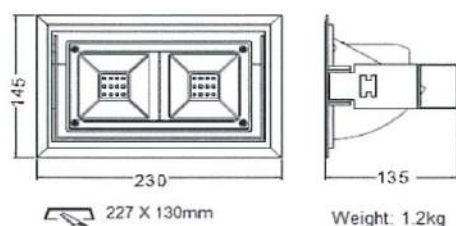

Optional Accessories



VIRGO II

The Luminux Virgo series track mount spotlights are the ideal replacement for metal-halide or halogen track/spotlight systems in commercial and residential applications. The fittings offer excellent light output with low energy consumption.







SPECIFICATIONS

Input Voltage	220VAC
LED Quantity	3 x 3W per unit
Power Consumption	9W per unit
LED Classification	High Power Cree 3W(700mA)
Color Temperature	Natural White / Warm White
Life Span	50,000hrs
Operation Temperature	-20°C ~ +50°C
Standard Lens Angle	40°
Weight	240g (Exclude Driver and Track)
Dimming	No
Exclusive LED Driver	Included



DIMENSION

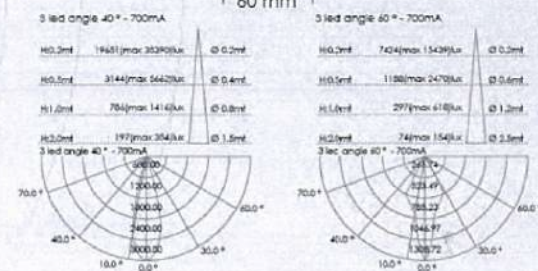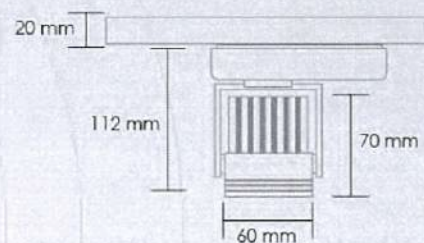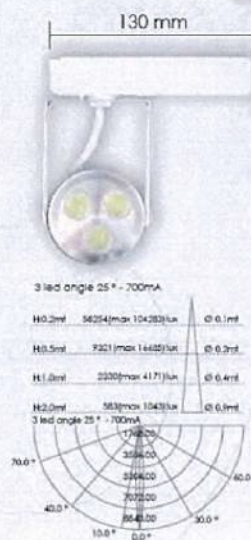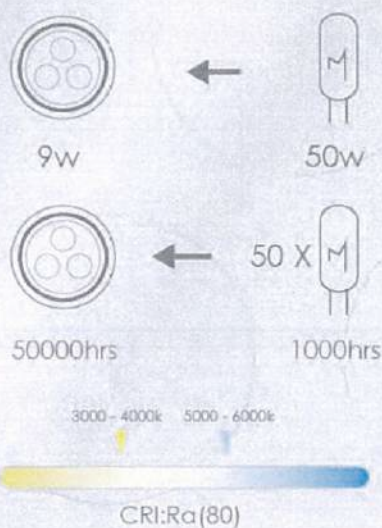

VIRGO II

The Luminux Virgo series track mount spotlights are the ideal replacement for metal-halide or halogen track/spotlight systems in commercial and residential applications. The fittings offer excellent light output with low energy consumption.







SPECIFICATIONS

Input Voltage	220VAC
LED Quantity	3 x 3W per unit
Power Consumption	9W per unit
LED Classification	High Power Cree 3W(700mA)
Color Temperature	Natural White / Warm White
Life Span	50,000hrs
Operation Temperature	-20°C ~ +50°C
Standard Lens Angle	40°
Weight	240g (Exclude Driver and Track)
Dimming	No
Exclusive LED Driver	Included



DIMENSION

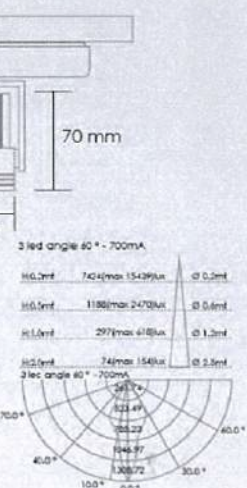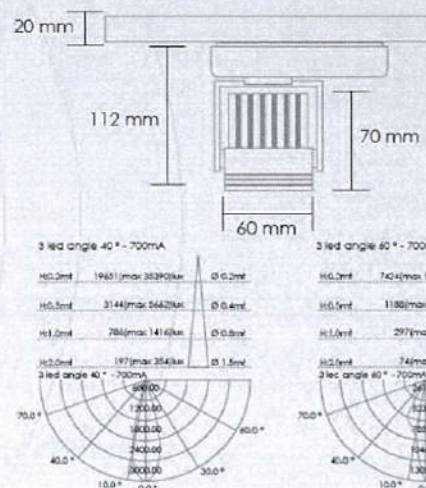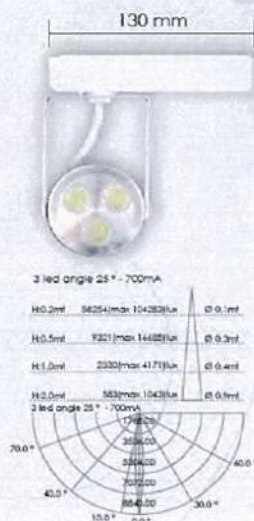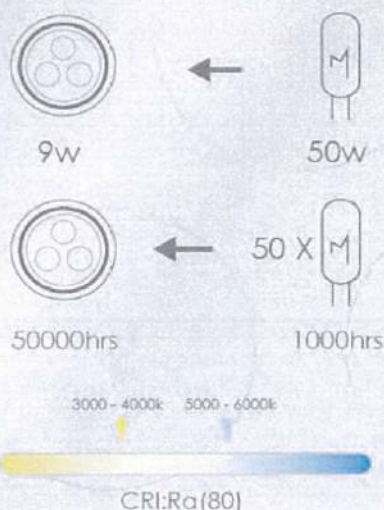

MORGAN

The Luminux Morgan dimmable track mount LED light consists of 3X3W Cree high power LED. With the build-in dimming system, it can be dimmed in multiple tracks and lights easily. Morgan can be applied to everywhere in the offices, retail shops and office as spotlight and downlight.



SPECIFICATIONS


Input Voltage	12VDC / 24VDC
LED Quantity	3 x 3W per unit
Power Consumption	9W per unit
Maximum Units Per Track	4 units
LED Classification	High Power Cree 3W(700mA)
Color Temperature	Natural White / Warm White
Life Span	50,000hrs
Operation Temperature	-20°C ~ +50°C
Standard Lens Angle	40°
Weight	240g (Exclude Driver and Track)
Dimming	Yes (0 - 100%) Optional Dimmer Required
Exclusive LED Driver	Included



DIMENSION




9w



50w



50000hrs



1000hrs

3000 - 4000K 5000 - 6000K

CRI:Ra(80)



3 led angle 25° - 700mA



Track length Maximum 100cm

18 mm

Power Connector
Color: Black / White

Special Light Track
for Morgan
Track Color: Black / White

120 mm

70 mm

60 mm

3 led angle 40° - 700mA



3 led angle 60° - 700mA



LED Driver: Luminux VA24040D006: Input 170 - 250VAC, Output 24VDC

Luminux VA 12030M: Input 170 - 250VAC, Output 12VDC




Kinwick Materials Limited - Wilson Fung 92303714 Email: wilsonfung168@hotmail.com

DAX-XX-XX
LED
Tracklight




Beam Angle
11W 3000K 14°

Photometrics




Beam Width and Illuminance

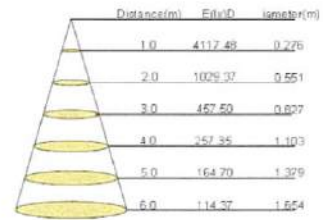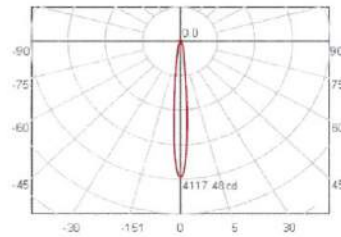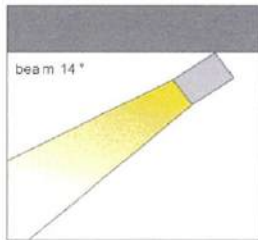




11W 3000K 32°

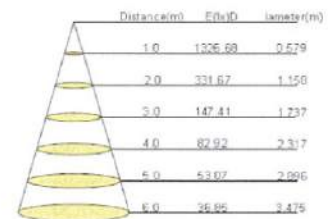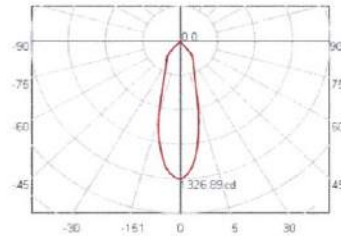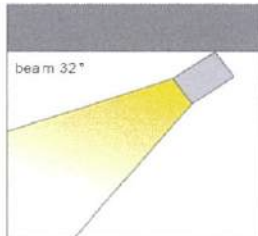



13W 3000K 14°

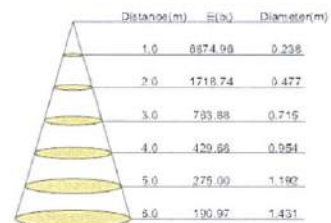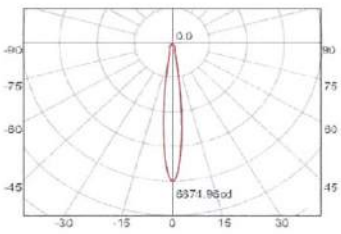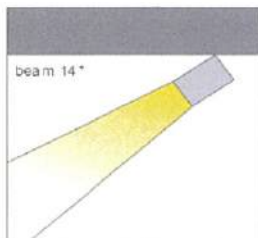




13W 3000K 32°

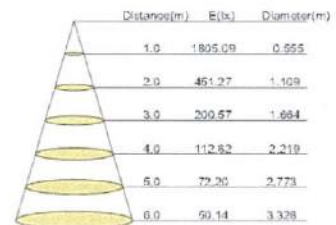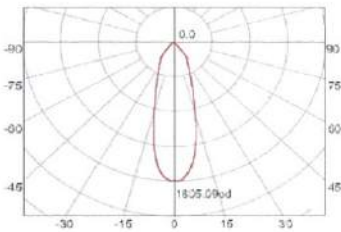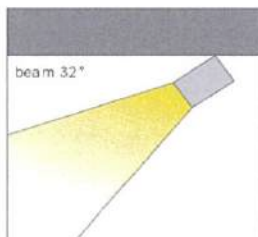

18W 3000K 14°

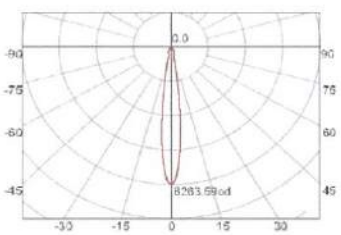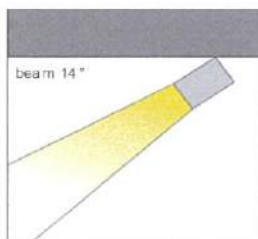

18W 3000K 32°

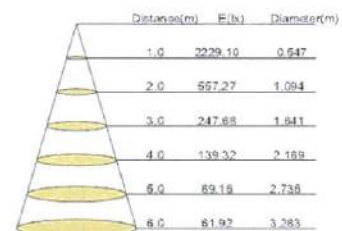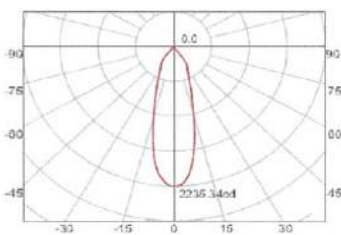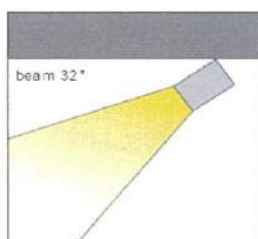

Luminux DA Design Series LED Tracklight

Luminux® High Power LED Lighting

www.luminux.com.hk

Luminux is proud to present you the Daniel Alexandra (DA) Design Series of LED Tracklight which is perfect for the retail shops, supermarkets, window displays, and most of commercial and architectural lighting. This unique Italian simple and classic design comes with the cutting edge LED technology and heat dissipation technology. It adopts multichips-array LED system (Sharp, Japan) technology which can produce up to 1770 lumen with 18W only. The highest color rendering option can be up to 93CRI. It is now possible to reduce energy consumption and maintenance costs without compromising on light quality and ambience.

Features

Italian Simple and Classic Design
Aluminum Cooling System
SHARP Multichips-Array LED System
Interchangeable Precise Reflector
Ultra-easy Installation
Power Option: 13W / 15W / 20W
Super Long Life - 70% maintenance of lumen after 50000 hours
Super High Color Rendering (84 or True Color 93 CRI)
Wide Selection of Beam Angle: 14°, 32°
Power factor: >0.94
RoHS Compliant
UV and IR Free




Product Offering

Item	LED Color	Reflector Angle	Finishing	Power Supply	CRI	Watt	Lumen	Track Connection
DAX-XX-XX	2700K	14°	White	220-240VAC	84	11W	850-1050	Asian Track
	3000K	32°	Black	220-240VAC	84	13W	1200-1360	Euro Track
	4000K		White and Black	220-240VAC	84	18W	1600-1770	
	5000K							
	2700K True Color			220-240VAC	93	18W	1300-1350	
	3000K True Color							
	4000K True Color							
	5000K True Color							

Application Information

Retail Shops
Supermarket
Window Display
Spot Lighting
Commercial Lighting

Dimension

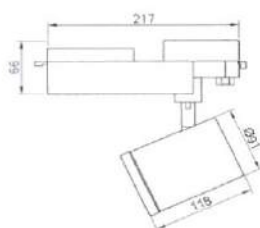

Optional Accessories

spare accessories
reflector 14°/32°



Hazel recessed LED downlight

Luminux® High Power LED Lighting

www.luminux.com.hk

Luminux is proud to present you the Hazel recessed LED downlight which is made by PHILIPS Disc LED module. The PHILIPS Disc LED module has a very high energy efficacy output, its efficacy is up to 61.5lm/W, totally up to 800 Lumen. It is a easy replacement for the traditional 2X13W CFL. The special design heatsink protects the LED module to ensure its durability and stability. Customer can save huge on maintenance and replacement cost because it maintains 95% of lumen after 30000 hours.

Features

- Superior Outlook
- Die-casting Aluminum alloy housing
- High quality anodized aluminum reflector
- Ultra-easy Installation - Recessed
- High efficiency lumen output 800lm/13W
- Super Long Life - 70% maintenance of lumen after 50000 hours
- Super High Color Rendering (>80CRI)
- RoHS Compliant
- UV and IR Free



Product Offering

Code	Description	Input Voltage	Power	Lumen	Color Temperature (K)	Remark
1	4" Hazel recessed LED Downlight	220VAC	13W	800	2700K/4000K/5000K	Philips Disc Module
2	5" Hazel recessed LED Downlight	220VAC	13W	800	2700K/4000K/5000K	Philips Disc Module
3	6" Hazel recessed LED Downlight	220VAC	13W	800	2700K/4000K/5000K	Philips Disc Module



Application Information

- Hotel
- Home
- Retail Shop
- Restaurant
- Commercial Building




PHILIPS Disc Module

Dimension

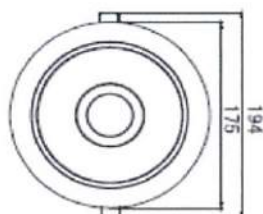

Disc LED 800lm

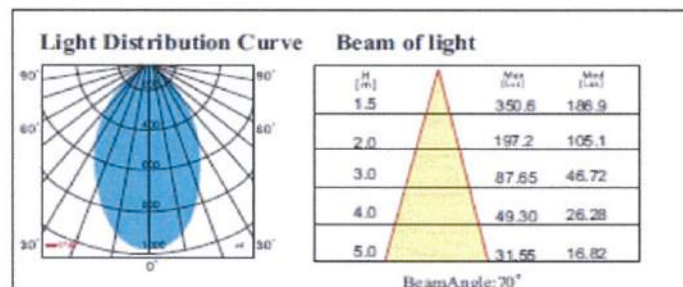

Annie recessed LED downlight

Luminux® High Power LED Lighting
www.luminux.com.hk

Luminux is proud to present you the Annie recessed LED downlight which is made by PHILIPS Fortimo LED DLM module.
The PHILIPS Fortimo LED DLM module has a very high energy efficacy output, its efficacy is up to 91lm/W, totally up to 2000 Lumen. It is a easy replacement for the traditional 2X26W CFL and 2X18W CFL downlight
The special design heatsink protects the LED module to ensure its durability and stability. Customer can save huge on maintenance and replacement cost because it maintains 95% of lumen after 30000 hours.

Features

Superior Outlook
Die-casting Aluminum alloy housing
High quality anodized aluminum reflector
Ultra-easy Installation - Recessed
High efficiency lumen output 1100lm/13W, 2000lm/23W, 3000lm/44W
Super Long Life - 70% maintenance of lumen after 50000 hours
Super High Color Rendering (>80CRI)
RoHS Compliant
UV and IR Free



Product Offering


Code	cription	Input Voltage	Power	Lumen	Color Temperature (K)	Remark
1	6" Annie recessed LED Downlight	220VAC	12W	1100	4000K	Philips Fortimo LED DLM Module
2	6" Annie recessed LED Downlight	220VAC	14W	1100	4000K	Philips Fortimo LED DLM Module
3	6" Annie recessed LED Downlight	220VAC	16W	1100	3000K	Philips Fortimo LED DLM Module
4	6" Annie recessed LED Downlight	220VAC	23W	2000	4000K	Philips Fortimo LED DLM Module
5	6" Annie recessed LED Downlight	220VAC	26W	2000	4000K	Philips Fortimo LED DLM Module
6	6" Annie recessed LED Downlight	220VAC	27W	2000	3500K	Philips Fortimo LED DLM Module
7	6" Annie recessed LED Downlight	220VAC	35W	2000	3000K	Philips Fortimo LED DLM Module
8	6" Annie recessed LED Downlight	220VAC	44W	3000	4000K	Philips Fortimo LED DLM Module
9	6" Annie recessed LED Downlight	220VAC	29W	2000	3000K	Philips Fortimo LED DLM Module
10	6" Annie recessed LED Downlight	220VAC	20W	1040	2700K	Philips Twist Module
11	6" Annie recessed LED Downlight	220VAC	20W	1100	3000K	Philips Twist Module
12	6" Annie recessed LED Downlight	220VAC	18W	1100	4000K	Philips Twist Module

Application Information

Hotel
Home
Retail Shop
Restaurant
Commercial Building




PHILIPS Twist Module

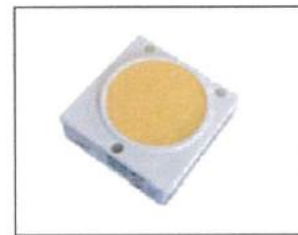


PHILIPS Fortimo LED DLM Module

Dimension

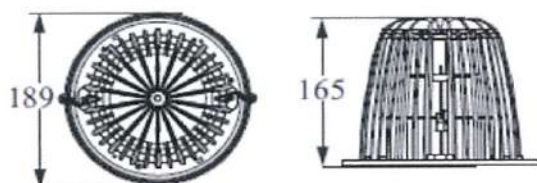

Fortimo LED DLM 2000lm

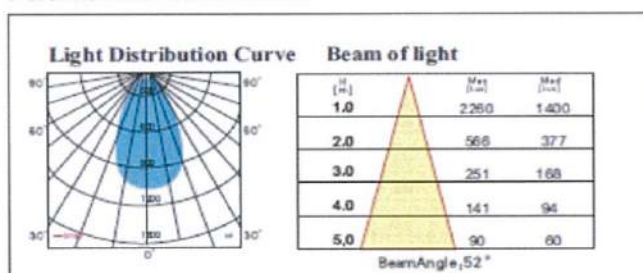

Nancy recessed LED downlight

Luminux® High Power LED Lighting
www.luminux.com.hk

Luminux is proud to present you the Nancy recessed LED downlight which is made by PHILIPS Fortimo LED module.

The PHILIPS Fortimo LED module has a wide selection of light output, from 1100 lumen up to 3000 lumen. It is a easy replacement for the traditional 2 X26W and 2X18W CFL downlight. The special design heatsink protects the LED module to ensure its durability and stability. Customer can save huge on maintenance and replacement cost because it maintains 70% of lumen after 50000 hours.

Features

Superior Outlook
Die-casting Aluminum alloy housing
High quality anodized aluminum reflector
Ultra-easy Installation - Recessed
High efficiency lumen output 1100lm/18W
Super Long Life - 70% maintenance of lumen after 50000 hours
Super High Color Rendering (>80CRI)
RoHS Compliant
UV and IR Free



Product Offering

Code	Description	Input Voltage	Power	Lumen	Color Temperature (K)	Remark
1	Nancy recessed LED Downlight	220VAC	12W	1100	4000K	Philips Fortimo LED DLM Module
2	Nancy recessed LED Downlight	220VAC	14W	1100	4000K	Philips Fortimo LED DLM Module
3	Nancy recessed LED Downlight	220VAC	16W	1100	3000K	Philips Fortimo LED DLM Module
4	Nancy recessed LED Downlight	220VAC	23W	2000	4000K	Philips Fortimo LED DLM Module
5	Nancy recessed LED Downlight	220VAC	26W	2000	4000K	Philips Fortimo LED DLM Module
6	Nancy recessed LED Downlight	220VAC	27W	2000	3500K	Philips Fortimo LED DLM Module
7	Nancy recessed LED Downlight	220VAC	35W	2000	3000K	Philips Fortimo LED DLM Module
8	Nancy recessed LED Downlight	220VAC	44W	3000	4000K	Philips Fortimo LED DLM Module
9	Nancy recessed LED Downlight	220VAC	29W	2000	3000K	Philips Fortimo LED DLM Module
10	Nancy recessed LED Downlight	220VAC	20W	1040	2700K	Philips Twist Module
11	Nancy recessed LED Downlight	220VAC	20W	1100	3000K	Philips Twist Module
12	Nancy recessed LED Downlight	220VAC	18W	1100	4000K	Philips Twist Module



Application Information

Hotel
Home
Retail Shop
Restaurant
Commercial Building




PHILIPS Twist Module

Dimension



Fortimo Twist 1100lm

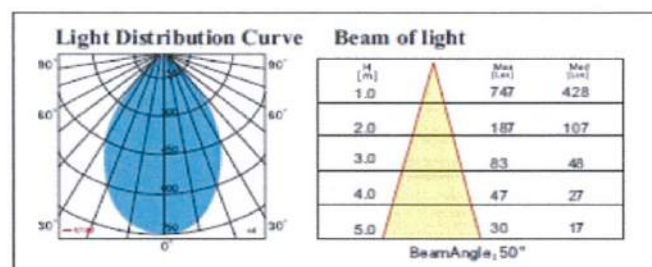

Christie recessed LED downlight

Luminux® High Power LED Lighting
www.luminux.com.hk

Luminux is proud to present you the Christie recessed LED downlight which is made by PHILIPS Fortimo LED module.

The PHILIPS Fortimo LED module has a wide selection of light output, from 1100 lumen up to 3000 lumen. It is a easy replacement for the traditional 2 X26W and 2X18W CFL downlight

The special design heatsink protects the LED module to ensure its durability and stability. Customer can save huge on maintenance and replacement cost because it maintains 70% of lumen after 50000 hours.

Features

Superior Outlook

Die-casting Aluminum alloy housing

High quality anodized aluminum reflector

Ultra-easy Installation - Recessed

High efficiency lumen output 1100lm/12W, 2000lm/23W, 3000lm/44W

Super Long Life - 70% maintenance of lumen after 50000 hours

Super High Color Rendering (>80CRI)

RoHS Compliant

UV and IR Free



Product Offering

Code	Description	Input Voltage	Power	Lumen	Color Temperature (K)	Remark
1	Christie recessed LED Downlight	220VAC	12W	1100	4000K	Philips Fortimo LED DLM Module
2	Christie recessed LED Downlight	220VAC	14W	1100	4000K	Philips Fortimo LED DLM Module
3	Christie recessed LED Downlight	220VAC	16W	1100	3000K	Philips Fortimo LED DLM Module
4	Christie recessed LED Downlight	220VAC	23W	2000	4000K	Philips Fortimo LED DLM Module
5	Christie recessed LED Downlight	220VAC	26W	2000	4000K	Philips Fortimo LED DLM Module
6	Christie recessed LED Downlight	220VAC	27W	2000	3500K	Philips Fortimo LED DLM Module
7	Christie recessed LED Downlight	220VAC	35W	2000	3000K	Philips Fortimo LED DLM Module
8	Christie recessed LED Downlight	220VAC	44W	3000	4000K	Philips Fortimo LED DLM Module
9	Christie recessed LED Downlight	220VAC	29W	2000	3000K	Philips Fortimo LED DLM Module

Application Information

Hotel

Home

Retail Shop


Restaurant

Commercial Building




PHILIPS Fortimo LED DLM Module

Dimension



Fortimo LED DLM 1100lm

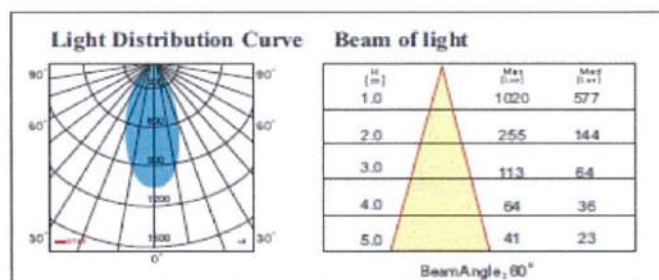

Dianna recessed LED downlight

Luminux® High Power LED Lighting
www.luminux.com.hk

Luminux is proud to present you the Dianna recessed LED downlight which is made by PHILIPS Fortimo LED module.

The PHILIPS Fortimo LED module has a wide selection of light output, from 1100 lumen up to 3000 lumen. It is a easy replacement for the traditional 2 X26W and 2X18W CFL downlight. The special design heatsink protects the LED module to ensure its durability and stability. Customer can save huge on maintenance and replacement cost because it maintains 70% of lumen after 50000 hours.

Features

Superior Outlook
Die-casting Aluminum alloy housing
High quality anodized aluminum reflector
Ultra-easy Installation - Recessed
High efficiency lumen output 1100lm/12W, 2000lm/23W, 3000lm/44W
Super Long Life - 70% maintenance of lumen after 50000 hours
Super High Color Rendering (>80CRI)
RoHS Compliant
UV and IR Free




Product Offering

Code	Description	Input Voltage	Power	Lumen	Color Temperature (K)	Remark
1	Dianna recessed LED Downlight	220VAC	12W	1100	4000K	Philips Fortimo LED DLM Module
2	Dianna recessed LED Downlight	220VAC	14W	1100	4000K	Philips Fortimo LED DLM Module
3	Dianna recessed LED Downlight	220VAC	16W	1100	3000K	Philips Fortimo LED DLM Module
4	Dianna recessed LED Downlight	220VAC	23W	2000	4000K	Philips Fortimo LED DLM Module
5	Dianna recessed LED Downlight	220VAC	26W	2000	4000K	Philips Fortimo LED DLM Module
6	Dianna recessed LED Downlight	220VAC	27W	2000	3500K	Philips Fortimo LED DLM Module
7	Dianna recessed LED Downlight	220VAC	35W	2000	3000K	Philips Fortimo LED DLM Module
8	Dianna recessed LED Downlight	220VAC	44W	3000	4000K	Philips Fortimo LED DLM Module
9	Dianna recessed LED Downlight	220VAC	29W	2000	3000K	Philips Fortimo LED DLM Module


Application Information

Hotel
Home
Retail Shop
Restaurant
Commercial Building

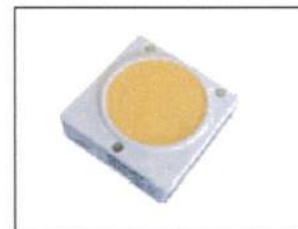


PHILIPS Fortimo LED DLM Module

Dimension



Fortimo LED DLM 1100lm

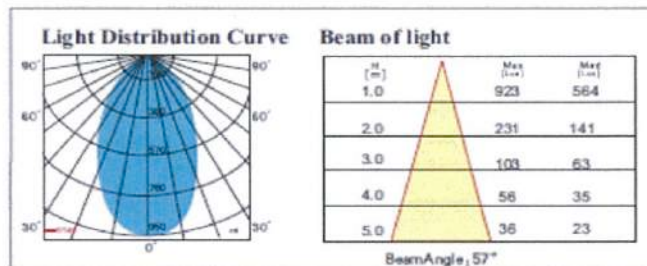

Katie recessed LED downlight

Luminux® High Power LED Lighting

www.luminux.com.hk

Luminux is proud to present you the Katie recessed LED downlight which is made by PHILIPS Fortimo LED module.

The PHILIPS Fortimo LED module has a wide selection of light output, from 1100 lumen up to 3000 lumen. It is a easy replacement for the traditional 2 X26W and 2X18W CFL downlight. The special design heatsink protects the LED module to ensure its durability and stability. Customer can save huge on maintenance and replacement cost because it maintains 70% of lumen after 50000 hours.

Features

Superior Outlook
Die-casting Aluminum alloy housing
High quality anodized aluminum reflector
Ultra-easy Installation - Recessed
High efficiency lumen output 1100lm/12W, 2000lm/23W, 3000lm/44W
Super Long Life - 70% maintenance of lumen after 50000 hours
Super High Color Rendering (>80CRI)
RoHS Compliant
UV and IR Free



Product Offering

Code	Description	Input Voltage	Power	Lumen	Color Temperature (K)	Remark
1	Katie recessed LED Downlight	220VAC	12W	1100	4000K	Philips Fortimo LED DLM Module
2	Katie recessed LED Downlight	220VAC	14W	1100	4000K	Philips Fortimo LED DLM Module
3	Katie recessed LED Downlight	220VAC	16W	1100	3000K	Philips Fortimo LED DLM Module
4	Katie recessed LED Downlight	220VAC	23W	2000	4000K	Philips Fortimo LED DLM Module
5	Katie recessed LED Downlight	220VAC	26W	2000	4000K	Philips Fortimo LED DLM Module
6	Katie recessed LED Downlight	220VAC	27W	2000	3500K	Philips Fortimo LED DLM Module
7	Katie recessed LED Downlight	220VAC	35W	2000	3000K	Philips Fortimo LED DLM Module
8	Katie recessed LED Downlight	220VAC	44W	3000	4000K	Philips Fortimo LED DLM Module
9	Katie recessed LED Downlight	220VAC	29W	2000	3000K	Philips Fortimo LED DLM Module


Application Information

Hotel
Home
Retail Shop
Restaurant
Commercial Building




PHILIPS Fortimo LED DLM Module

Dimension

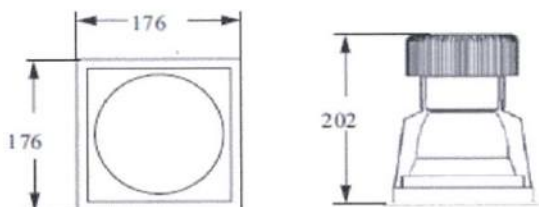

Fortimo LED DLM 1100lm

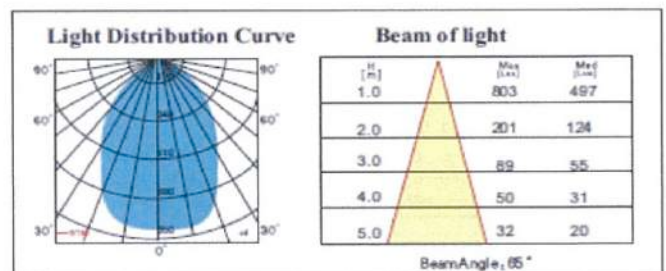

Judie recessed LED downlight

Luminux® High Power LED Lighting

www.luminux.com.hk

Luminux is proud to present you the Judie recessed LED downlight which is made by PHILIPS Fortimo LED module.

The PHILIPS Fortimo LED module has a wide selection of light output, from 1100 lumen up to 3000 lumen. It is a easy replacement for the traditional 2 X26W and 2X18W CFL downlight

The special design heatsink protects the LED module to ensure its durability and stability. Customer can save huge on maintenance and replacement cost because it maintains 70% of lumen after 50000 hours.

Features

Superior Outlook

Die-casting Aluminum alloy housing

High quality anodized aluminum reflector

Ultra-easy Installation - Recessed

High efficiency lumen output 1100lm/12W, 2000lm/23W, 3000lm/44W

Super Long Life - 70% maintenance of lumen after 50000 hours

Super High Color Rendering (>80CRI)

RoHS Compliant

UV and IR Free



Product Offering

Code	Description	Input Voltage	Power	Lumen	Color Temperature (K)	Remark
1	Judie recessed LED Downlight	220VAC	12W	1100	4000K	Philips Fortimo LED DLM Module
2	Judie recessed LED Downlight	220VAC	14W	1100	4000K	Philips Fortimo LED DLM Module
3	Judie recessed LED Downlight	220VAC	16W	1100	3000K	Philips Fortimo LED DLM Module
4	Judie recessed LED Downlight	220VAC	23W	2000	4000K	Philips Fortimo LED DLM Module
5	Judie recessed LED Downlight	220VAC	26W	2000	4000K	Philips Fortimo LED DLM Module
6	Judie recessed LED Downlight	220VAC	27W	2000	3500K	Philips Fortimo LED DLM Module
7	Judie recessed LED Downlight	220VAC	35W	2000	3000K	Philips Fortimo LED DLM Module
8	Judie recessed LED Downlight	220VAC	44W	3000	4000K	Philips Fortimo LED DLM Module
9	Judie recessed LED Downlight	220VAC	29W	2000	3000K	Philips Fortimo LED DLM Module

Application Information

Hotel

Home

Retail Shop


Restaurant

Commercial Building




PHILIPS Fortimo LED DLM Module

Dimension

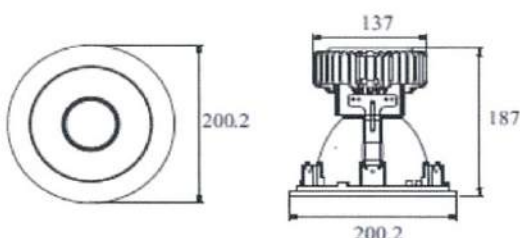

Fortimo LED DLM 1100lm

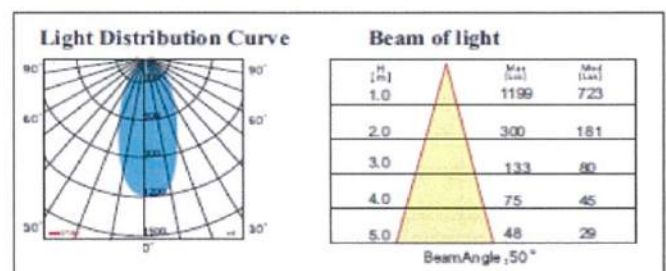

Emily recessed LED downlight

Luminux® High Power LED Lighting
www.luminux.com.hk

Luminux is proud to present you the Emily recessed LED downlight which is made by PHILIPS Disc LED module. The PHILIPS Disc LED module has a very high energy efficacy output, its efficacy is up to 61.5lm/W, totally up to 800 Lumen. It is a easy replacement for the traditional 2X13W CFL. The special design heatsink protects the LED module to ensure its durability and stability. Customer can save huge on maintenance and replacement cost because it maintains 95% of lumen after 30000 hours.

Features

Superior Outlook
Die-casting Aluminum alloy housing
High quality anodized aluminum reflector
Ultra-easy Installation - Recessed
180° Adjustable
High efficiency lumen output 800lm/13W
Super Long Life - 70% maintenance of lumen after 50000 hours
Super High Color Rendering (>80CRI)
RoHS Compliant
UV and IR Free



Product Offering

Code	Description	Input Voltage	Power	Lumen	Color Temperature (K)	Remark
1	4" Emily recessed LED Downlight	220VAC	13W	800	2700K/4000K/5000K	Philips Disc Module
2	5" Emily recessed LED Downlight	220VAC	13W	800	2700K/4000K/5000K	Philips Disc Module
3	6" Emily recessed LED Downlight	220VAC	13W	800	2700K/4000K/5000K	Philips Disc Module

Application Information



Hotel
Home
Retail Shop
Restaurant
Commercial Building



PHILIPS Disc Module

Dimension

Disc LED 800lm

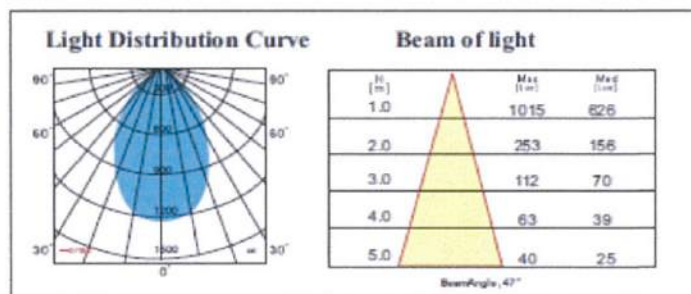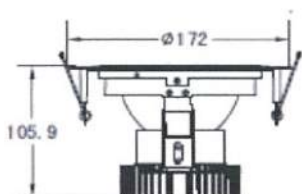

Lucy recessed LED spotlight

Luminux® High Power LED Lighting
www.luminux.com.hk

Luminux is proud to present you the Lucy recessed LED spotlight which is made by PHILIPS Fortimo LED SLM module. The PHILIPS Fortimo LED SLM module has a very high energy efficacy output, its efficacy is up to 91lm/W, totally up to 2000 Lumen. It is a easy replacement for the traditional 75W and 125W Halogen spotlight. The special design heatsink protects the LED module to ensure its durability and stability. Customer can save huge on maintenance and replacement cost because it maintains 95% of lumen after 30000 hours.

Features

Superior Outlook
Die-casting Aluminum alloy housing
High quality anodized aluminum reflector
Ultra-easy Installation - Recessed
Light Angel Adjustable
High efficiency lumen output 1100lm/17W, 2000lm/31W
Super Long Life - 70% maintenance of lumen after 50000 hours
Super High Color Rendering (>80CRI)
RoHS Compliant
UV and IR Free



Product Offering

Code	Description	Input Voltage	Power	Lumen	Color Temperature (K)	Remark
1	Lucy Recessed LED Spotlight	220VAC	17W	1100	4000K	Philips Fortimo LED SLM Module
2	Lucy Recessed LED Spotlight	220VAC	18W	1100	3500K	Philips Fortimo LED SLM Module
3	Lucy Recessed LED Spotlight	220VAC	18W	1100	3000K	Philips Fortimo LED SLM Module
4	Lucy Recessed LED Spotlight	220VAC	31W	2000	4000K	Philips Fortimo LED SLM Module
5	Lucy Recessed LED Spotlight	220VAC	33W	2000	3500K	Philips Fortimo LED SLM Module
6	Lucy Recessed LED Spotlight	220VAC	33W	2000	3000K	Philips Fortimo LED SLM Module


Application Information

Hotel
Home
Retail Shop
Restaurant
Commercial Building




Fortimo SLM PHILIPS Module


Dimension

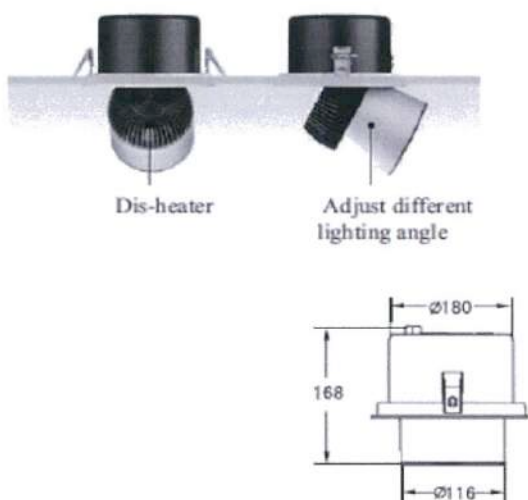

Fortimo LED SLM module 2000lm

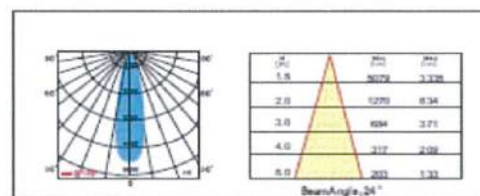

Fortimo LED SLM module 1100lm

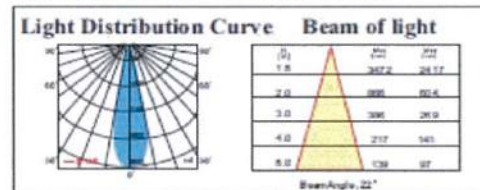

Bettie recessed LED downlight

Luminux® High Power LED Lighting
www.luminux.com.hk

Luminux is proud to present you the Bettie recessed LED downlight which is made by PHILIPS Disc LED module.
The PHILIPS Disc LED module has a very high energy efficacy output, its efficacy is up to 61.5lm/W, totally up to 800 Lumen. It is a easy replacement for the traditional 2X13W CFL.
The special design heatsink protects the LED module to ensure its durability and stability. Customer can save huge on maintenance and replacement cost because it maintains 70% of lumen after 50000 hours.

Features

Superior Outlook
Die-casting Aluminum alloy housing
High quality anodized aluminum reflector
Ultra-easy Installation - Recessed
High efficiency lumen output 800lm/13W
Super Long Life - 95% maintenance of lumen after 30000 hours
Super High Color Rendering (>80CRI)
RoHS Compliant
UV and IR Free



Product Offering

Code	cription	Input Voltage	Power	Lumen	Color Temperature (K)	Remark
1	Bettie Recessed LED Downlight	220VAC	1X13W	800	2700K/4000K/5000K	Philips Disc Module
2	Bettie Recessed LED Downlight	220VAC	2X13W	1600	2700K/4000K/5000K	Philips Disc Module
3	Bettie Recessed LED Downlight	220VAC	3X13W	2400	2700K/4000K/5000K	Philips Disc Module




Application Information

Hotel
Home
Retail Shop
Restaurant
Commercial Building




PHILIPS Disc Module

Dimension

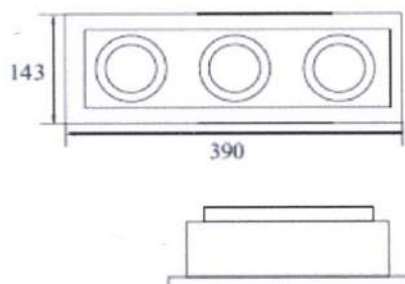

Disc LED 800lm

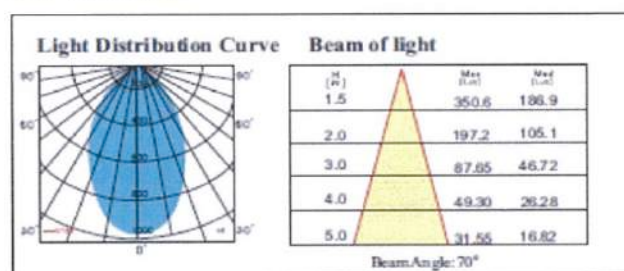

Luminux MWR3008H

Luminux® High Power LED Lighting
www.luminux.com.hk

Luminux is proud to present you the MWR3008H which is perfect for the indoor walls and steps. This stylish Italian design and covered with transparent glass makes the product looks fabulous and luxury. With one high power LED build-in design, it is now possible to reduce energy consumption and maintenance costs without compromising on light quality and ambience.

Features

Superior Italian Design
Brush Aluminum Housing
Transparent Glass cover
Ultra-easy Installation
Build-in One High Power LED (Cree)
Super Long Life - 70% maintenance of lumen after 50000 hours
Super High Color Rendering (85CRI)
RoHS Compliant
UV and IR Free



Product Offering

Item	LED Color	Lens angle	Finishing	Power Supply	mA	Watt	Lumen	Connection
MWR3008H	White	Transparent Glass	■ Brush Aluminum	220VAC		3	105	Parallel
	☀ Warm-White							
	🔴 Red							
	🟢 Green							
	🟡 Blue							
	🟠 Amber							

Application Information

Indoor wall
Indoor Steps Wall

Dimension

1. with spring for hollow wall
2. with embedded box for solid wall

